


- NOTES:
- MATERIAL
 - CABLE: [(7/0.12 BARE COPPER + PVC), SPIRAL(28/0.1 BARE COPPER) SHIELDED] X 2 FLAT, RED PVC JACKET.
OD=Ø4.0X8.0±0.2mm
 - CN1 ~ CN4: RCA MALE, SOLDER TYPE, GOLD PLATED CONTACTS AND SHELL, WITH NICKEL PLATED TUBE.
 - STRAIN RELIEF MOLDED: BLACK PVC.
 - TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
 - EACH CABLE IN BLISTER WITH PAPER CARD.



P/N CHART		
P/N.	L (mm)	T (mm)
147450	5000	+152/-51
147430	3000	+152/-51
147415	1500	+152/-51
147405	500	±50

	mm
SCALE	NONE
SHEET	1/1
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED	
.X ±0.3	.XX ±
.XXX ±	ANGLES ±
REV. 00	CUS. REV.

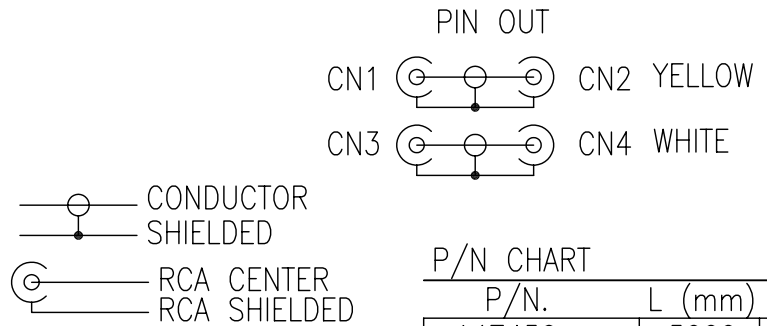

2xRCA M to 2xRCA M